


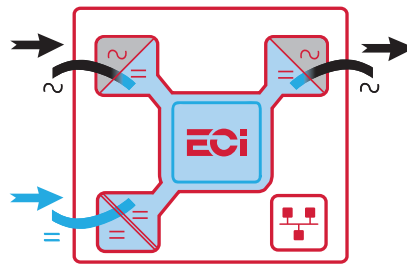
Modular inverter to efficiently secure critical applications from 1.25 kVA!

 Telecom
  Datacom
  Mass transport
  Industry
  Power Utilities
  Renewable



Description

Bravo 10 is a **small modular inverter** offering many opportunities to **design a solution** that perfectly fits your needs. The ECI technology offers both **AC and DC inputs** to provide a **perfect AC power** while reducing the number of power conversion (the module operates under normal condition with the AC input delivering a **96% efficiency**)! In conjunction with the DC input, it provides an excellent **AC backup solution**.



From **1 to 32 modules**, with several **options** available (manual external by-pass and AC distribution), the Bravo 10 modular inverter is also **hot-swappable** meaning a very easy and cheap maintenance. The modules are delivered with our new monitoring solution.

Bravo 10 can be used with the **Inview S** (DIN or panel mounting), **Inview Slot** and **Inview GW** monitoring. One shelf can accommodate 5 modules (6.25 kVA) or 4 modules (5 kVA) with Inview S Slot monitoring included.



Applications

An ideal solution for securing small but critical AC loads, from 1.25 kVA to 40 kVA, such as telecom small cells (4G and 5G), access control, traffic lights, security, etc. The module can be integrated into shelves for single-phase (230 Vac) or three-phase (3x400 Vac) installation with different output powers. We have already designed 3 shelves configurations: 5 modules (6.25 kVA, single-phase), 4 modules (5 kVA, single-phase) and 9 modules (11.25 kVA, single-phase).

Key features:

- AC and DC input sources (highest efficiency topology)
- 1 to 32 modules and 1 or 3 phases configuration
- Customization (manual by-pass and AC distribution)
- Transfer time reduced to 0 ms
- Compact design

Illustrations are non-binding and may include customized fittings.

Bravo 10 - 48/230

General

Part Number: Module / Shelf	T611730201 / T614730000
Cooling / Audible noise	Fan forced cooling / < 65 dBA at 1 meter
MTBF	240 000 hrs (MIL-217IF)
Dielectric strength DC/AC	4300 Vdc
RoHS	Compliant
Operating T° / Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-3 Class 3.1 -20°C to 65°C, power de-rating from 40°C to 65°C / Max RH 95% for 96 hours per year
Storage T° / Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-1 Class 1.2 -40°C to 70°C / Max RH 95% for 96 hours per year
Public transport T°/Relative Humidity (RH) non-condensing	Tested according ETS300-019-2-2 Class 3.1 -40°C to 70°C / Max RH 95% for 96 hours per year
Material (casing)	Zinc coated steel

Power

AC Input Data

AC voltage: Nominal / range	230 V (150 - 265 V)
Brownout	800 W @ 150 Vac / 1000 W @ >190 Vac linear decreasing
Power factor / THD	> 99% / < 3%
Frequency range (selectable) / synchronization range	50 Hz (range 47 – 53 Hz) / 60 Hz (range 57 – 63 Hz)

DC Input Data

DC voltage: Nominal / range	48 VDC / (40-60V)*
Nominal current (at 48 Vdc and 1000 W output)	22.3 A
Maximum input current (at 48 Vdc for 15 second) / voltage ripple	34 A / < 10 mV RMS

AC Output Data

Efficiency (Typical): Enhanced power conversion / on line	96% / >92.5%
Nominal voltage AC** Adjustable)	230 V (200 - 240 VAC)
Frequency / frequency accuracy	50 or 60 Hz / 0.03%
Nominal Output power	1250 VA / 1000 W
Short time overload capacity	150% (15 seconds)
Admissible load power factor	Full power rating from 0 inductive to 0 capacitive
Total harmonic distortion (resistive load)	< 3%
Load impact recovery time (10% - 90%)	≤ 0.4 ms
Nominal current	5.4 A @ 230 Vac
Crest factor at nominal power	3 : 1 for load P.F. ≤ 0.7
Short circuit clear up capacity 0 - 20 ms	22.7 A (peak) and 18.8 A (rms)
Short circuit current after >20 ms -15 s / after 15 s	11.3 A (peak) and 9.5 A (rms) / 8.5 A (peak) and 7.1 A (rms)
AC output voltage stability	±1% from 10% to 100% load

In Transfer Performance

Max. voltage interruption / total transient voltage duration (max)	0 s / 0 s
--	-----------

Signaling & Supervision


Display	Synoptic LED
Supervision	Inview ranges: Inview S - T302004100, Inview Slot - T602004110, Inview GW - T602004000
Remote on / off	On rear terminal of the shelf
Alarms output	2 dry contacts and 2 digital inputs

Safety & EMC

Safety	EN62040-1
EMC	EN 61000-4-2 / EN 61000-4-3 / EN 61000-4-4 / EN 61000-4-5 / EN 61000-4-6 / EN 61000-4-8 ETSI EN 300386 v1.9.1

* Permanent 1000 W / derating apply based on internal heatsink T°.

** Operation within lower voltage networks leads to de-rating of power performances.

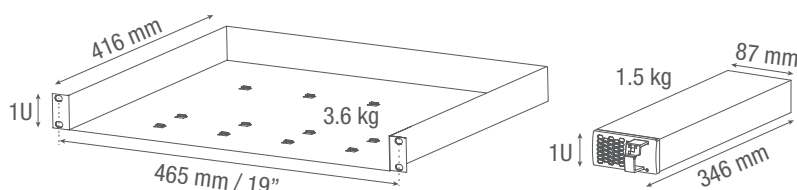

Bravo 10 - 48/230 - Datasheet v2.1 Specifications can change without notice. New data will be updated on our website: www.cet-power.com. The present equipment is protected by several international patents, trademarks and copyrights.